




Kima K2

Application:

Frost protection waterpipes.
Approved to be installed in and on the water pipe.

Specification:

- Flameretardent selflimiting heatingcable.
- Steel armoured metallic sheath with minimum electric fields.
- Approved to be installed in and on the water pipe.
- Insulation class I.
- IP67.
- Operating temperature max +50°C.
- Mecanical strength, armoured class C according to EN60800.
- Voltage 230 Volt.
- Wattage 11 W/m at + 5°C.
- 88 mAmp current operation at -10°C.
- Manufactured according to standard EN60800, SS4242411.
- Complies with RoHS directive 2002/95/EC.

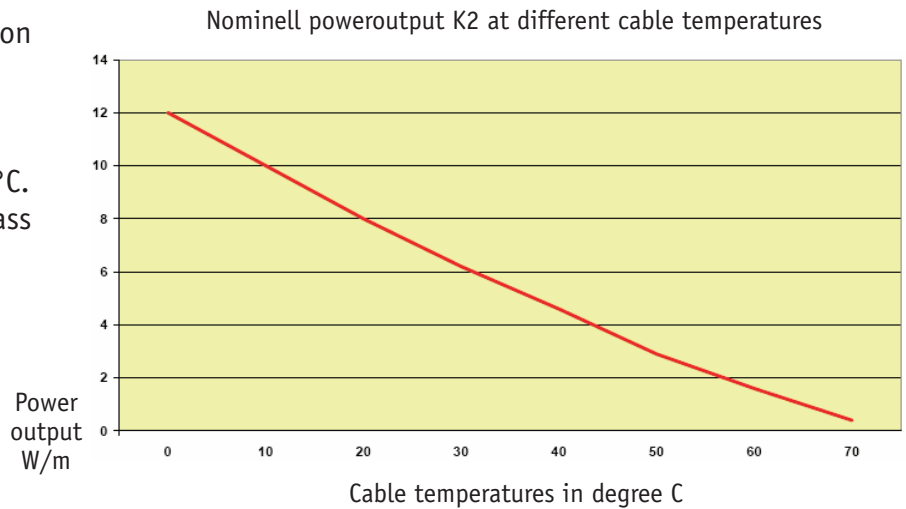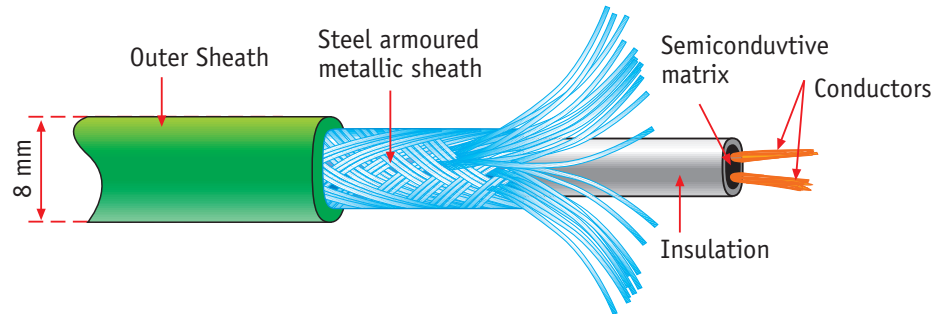

Electricfuse Amp	Max Cable Length m
10	85
16	115
20	145

Part no.	EAN no.	Product Type	Length (m)	Wattage (W/m)
E 89 876 50	7331002911234	KIMA K2	25	11
E 89 876 51	7331002911227	KIMA K2	50	11
E 89 876 52	7331002911210	KIMA K2	Supplied on reel	11

Accessories

Part no.	EAN no.	Product Type
E 89 876 57	7331002908111	KIMA K2/K3 Connection Kit
E 89 876 58	7331002908128	KIMA K2/K3 End Seal Kit
E 89 876 59	7331002908135	KIMA K2/K3 Splice Kit Cold Tail
E 89 876 55	7331002908104	KIMA K2/K3 Connection & End Seal Kit

