


# Kima K3

## Application:



Snow and ice melting roof and gutters. Frost protection pipes outside diameter > 100 mm, installation on the pipe.

## Specification:

- Flameretardent selflimiting heatingcable.
- Steel armoured metallic sheath with minimum electric fields.
- Insulation class I.
- IP67.
- Operating temperature max +65°C.
- Mecanical strength, armoured class C according to EN60800.
- Voltage 230 Volt.
- Wattage 20 W/m at + 5°C.
- 120 mAmp current operation at -10°C.
- Manufactured according to standard EN60800, SS4242411.
- Complies with RoHS directive 2002/95/EC.

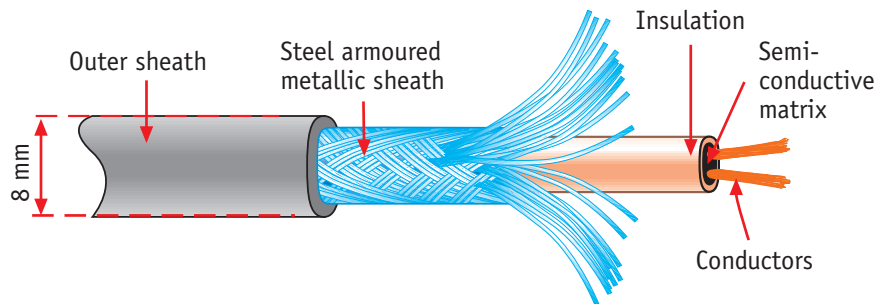

Nominell poweroutput K3 at different cable temperatures.

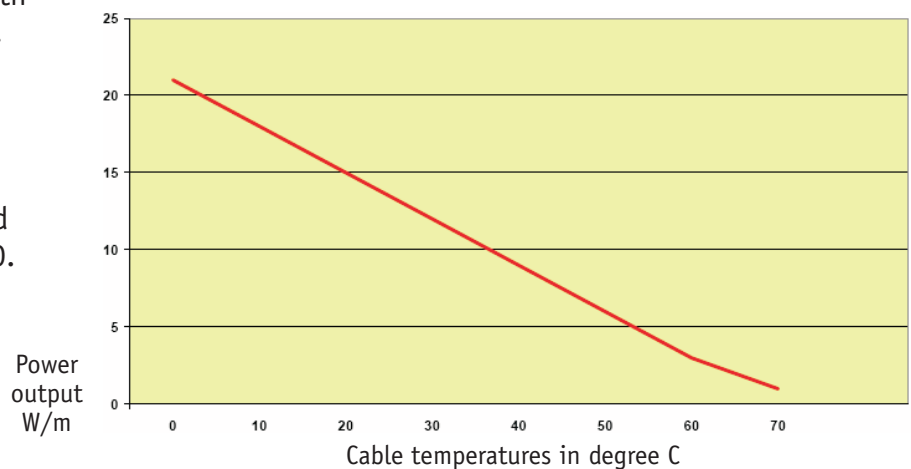

Electricfuse Amp	Max Cable Length m
10	55
16	90
20	110

Part no.	EAN no.	Product Type	Length (m)	Wattage (W/m)
E 89 876 41	7331002911265	KIMA K3	25	20
E 89 876 42	7331002911258	KIMA K3	50	20
E 89 876 53	7331002911241	KIMA K3	Supplied on reel	20

## Tillbehör

Part no.	EAN no.	Product Type
E 89 876 57	7331002908111	KIMA K2/K3 Connection Kit
E 89 876 58	7331002908128	KIMA K2/K3 End Seal Kit
E 89 876 59	7331002908135	KIMA K2/K3 Splice Kit Cold Tail
E 89 876 55	7331002908104	KIMA K2/K3 Connection & End Seal Kit

