

# Kima K4


## Application:

Snow and ice melting roof and gutters. Frost protection pipes outside diameter > 200 mm, installation on the pipe.



## Specification:

- Flameretardent selflimiting heatingcable.
- Steel armoured metallic sheath with minimum electric fields.
- Insulation class I.
- IP67.
- Operating temperature max +65°C.
- Mecanical strength; armoured class C according to EN60800.
- Voltage 230 Volt.
- Wattage 28 W/m vid + 5°C.
- 170 mAmp current operation at -10°C.
- Manufactured according to standard EN60800, SS4242411.
- Complies with RoHS directiv 2002/95/EC.

Power output  
W/m

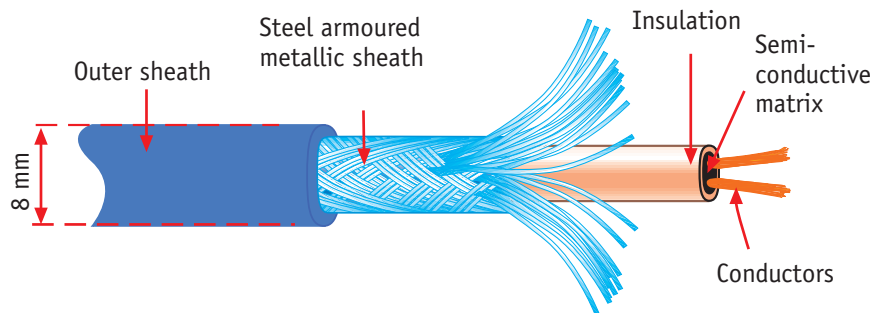

Nominell poweroutput K4 at different cable temperatures

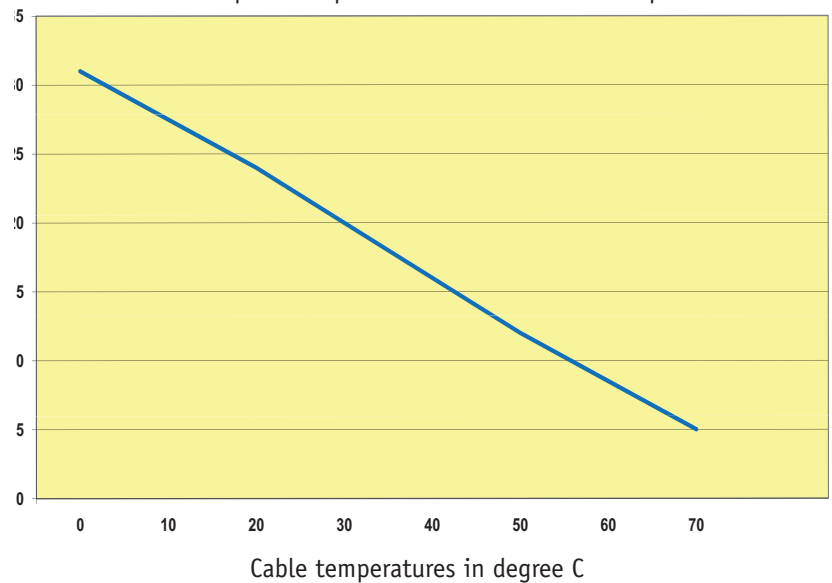

| Electricfuse<br>Amp | Max Cable<br>Length<br>m |
|---------------------|--------------------------|
| 10                  | 40                       |
| 16                  | 65                       |
| 20                  | 75                       |

| Part no. | EAN no.       | Product Type | Length (m)       | Wattage (W/m) |
|----------|---------------|--------------|------------------|---------------|
| 20090016 | 7331002911272 | KIMA K4      | Supplied on reel | 28            |

## Tillbehör

| Part no.    | EAN no.       | Product Type                            |
|-------------|---------------|---|
| E 89 876 57 | 7331002908111 | KIMA K2/K3/K4 Connection Kit            |
| E 89 876 58 | 7331002908128 | KIMA K2/K3/K4 End Seal Kit              |
| E 89 876 59 | 7331002908135 | KIMA K2/K3/K4 Splice Kit Cold Tail      |
| E 89 876 55 | 7331002908104 | KIMA K2/K3/K4 Connection & End Seal Kit |

