


# Kima Dark Red

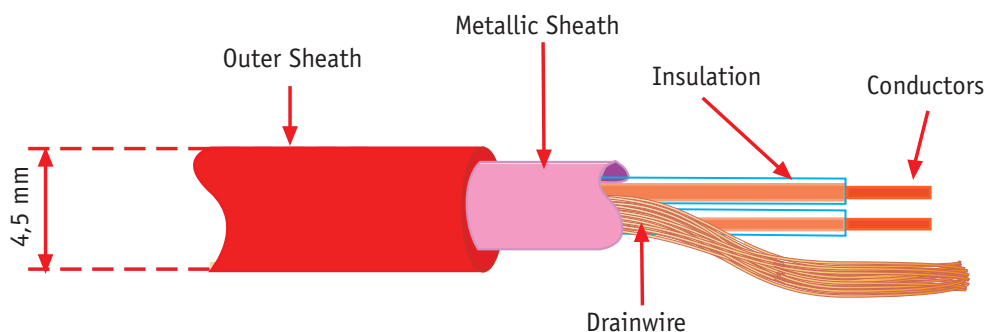


## Application:

Underfloor heating in thin floor construction on top of an existing concrete floor construction in wet and dry areas.  
Underfloor heating in ordinary concrete floor construction in wet and dry areas.  
Pipe tracing, installation on the pipe.

## Specification:

- Flameretardent twin conductor.
- Metallic Sheath, 100 % coverage.
- Insulation class I
- IP67
- Operating temperature max +70°C.
- Voltage 230 Volt.
- 2 m coldtail with earth.
- Manufactured according to EN60800.
- Complies with RoHS directive 2002/95/EC.



120 W/m<sup>2</sup> = c/c 15 cm  
100 W/m<sup>2</sup> = c/c 18 cm  
85 W/m<sup>2</sup> = c/c 21 cm  
75 W/m<sup>2</sup> = c/c 24 cm  
60 W/m<sup>2</sup> = c/c 30 cm  
50 W/m<sup>2</sup> = c/c 36 cm

Part no.	EAN no.	Product Type	Length (m)	Wattage (W)	Tolerance total (Ohm)
125 000 65	7331002913467	KIMA Dark Red	6,5	120	419 - 485
125 001 00	7331002913474	KIMA Dark Red	10	175	287 - 333
125 001 30	7331002913481	KIMA Dark Red	13	230	219 - 253
125 001 60	7331002913498	KIMA Dark Red	16	300	168 - 194
125 002 30	7331002913504	KIMA Dark Red	23	400	126 - 145
125 002 90	7331002913511	KIMA Dark Red	29	525	96 - 111
125 003 90	7331002913528	KIMA Dark Red	39	700	72 - 83
125 004 70	7331002913535	KIMA Dark Red	47	850	59 - 68
125 005 20	7331002913542	KIMA Dark Red	52	930	54 - 63
125 006 00	7331002913559	KIMA Dark Red	60	1075	47 - 54
125 007 00	7331002913566	KIMA Dark Red	70	1200	42 - 48
125 007 50	7331002913573	KIMA Dark Red	75	1350	37 - 43
125 009 00	7331002913580	KIMA Dark Red	90	1550	32 - 38
125 010 50	7331002913597	KIMA Dark Red	105	1900	26 - 31
125 012 00	7331002913603	KIMA Dark Red	120	2150	23 - 27
125 013 50	7331002913610	KIMA Dark Red	135	2450	21 - 24

PRO00101029 080916

