


Kima ORK

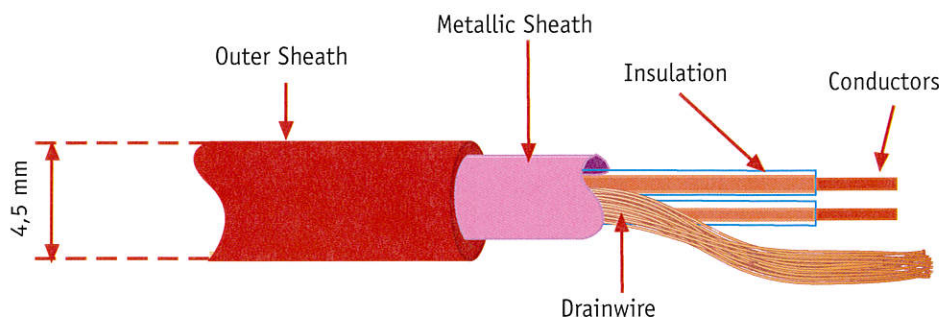


Application:

Underfloor heating in thin floor construction on top of an existing concrete floor construction in wet and dry areas.
Underfloor heating in ordinary concrete floor construction in wet and dry areas.

Specification:

- Flameretardent twin conductor.
- Metallic Sheath, 100 % coverage.
- Insulation class I
- IP67
- Operating temperature max +70°C.
- Voltage 230 Volt.
- 2 m coldtail with earth.
- Manufactured according to EN60800.
- Complies with RoHS directive 2002/95/EC.

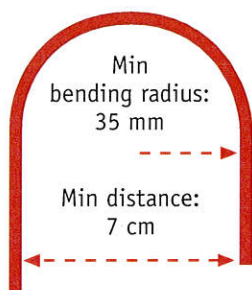

| | |
|-----|--------------------------------|
| 100 | W/m ² = c/c 10 cm |
| 75 | W/m ² = c/c 13,5 cm |
| 67 | W/m ² = c/c 15 cm |
| 50 | W/m ² = c/c 20 cm |
| 40 | W/m ² = c/c 25 cm |

| Part no. | EAN no. | Product Type | Length (m) | Wattage (W) | Tolerance total (Ohm) |
|----------|---------------|--------------|------------|-------------|-----------------------|
| 10440001 | 7331002912125 | KIMA ORK | 13 | 130 | 387 - 448 |
| 10440002 | 7331002912132 | KIMA ORK | 22 | 220 | 228 - 265 |
| 10440003 | 7331002912149 | KIMA ORK | 30 | 300 | 168 - 194 |
| 10440004 | 7331002912156 | KIMA ORK | 43 | 430 | 117 - 135 |
| 10440005 | 7331002912163 | KIMA ORK | 52 | 520 | 97 - 112 |
| 10440006 | 7331002912170 | KIMA ORK | 63 | 630 | 80 - 92 |
| 10440007 | 7331002912187 | KIMA ORK | 70 | 700 | 72 - 83 |
| 10440008 | 7331002912194 | KIMA ORK | 80 | 800 | 63 - 73 |
| 10440009 | 7331002912200 | KIMA ORK | 91 | 910 | 55 - 64 |
| 10440010 | 7331002912217 | KIMA ORK | 100 | 1000 | 50 - 58 |
| 10440011 | 7331002912224 | KIMA ORK | 117 | 1170 | 43 - 50 |
| 10440012 | 7331002912736 | KIMA ORK | 130 | 1300 | 39 - 45 |
| 10440013 | 7331002912231 | KIMA ORK | 142 | 1420 | 35 - 41 |
| 10440014 | 7331002912743 | KIMA ORK | 160 | 1600 | 31 - 36 |
| 10440015 | 7331002912448 | KIMA ORK | 182 | 1820 | 28 - 32 |

PROD0501002 090116