

Kima Warm Floor Mat 120


Aplicatii:

Incalzire electrica in pardoseala in podelele subtiri, in partea de sus a unei pardoseli de beton existente, in zonele umede si uscate.

Important! Cablul incalzitor nu poate fi taiat.

Specificatii tehnice:

- Ignifug, conductor bifilar fara camp magnetic
- Izolatie - clasa I
- IP67
- Temperatura de operare max +90°C
- Tensiune de alimentare 230 Volt
- Putere 120 W/m².
- Latime 500 mm.
- Cablu de alimentare - 3 m cu ecranaj metalic.
- Fabricat in conformitate cu EN60335-1, EN60335-2-96.
- Respecta directiva RoHs 2002/95/EC

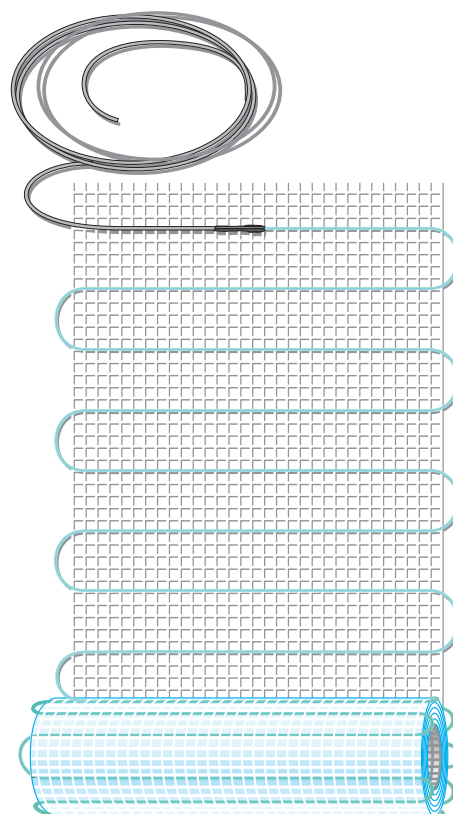

Nr. Art.	Cod produs.	Tip produs	Latime (mm)	Lungime(m)	Putere(W)	Suprafata (m ²)	Rezistenta (Ohm)
107 300 09	7331002905011	KIMA WFM 120	500	1,9	110	0,95	457 - 529
107 300 08	7331002905028	KIMA WFM 120	500	3,2	190	1,6	265 - 306
107 300 00	7331002905035	KIMA WFM 120	500	4,0	240	2,0	209 - 242
107 300 10	7331002905042	KIMA WFM 120	500	4,8	285	2,4	176 - 204
107 300 01	7331002905059	KIMA WFM 120	500	6,2	390	3,1	129 - 149
107 300 11	7331002905066	KIMA WFM 120	500	7,2	430	3,6	117 - 135
107 300 02	7331002905073	KIMA WFM 120	500	8,0	470	4,0	107 - 124
107 300 03	7331002905080	KIMA WFM 120	500	10,2	635	5,1	79 - 92
107 300 04	7331002905097	KIMA WFM 120	500	12,6	760	6,3	66 - 77
107 300 12	7331002905103	KIMA WFM 120	500	14,8	880	7,4	57 - 66
107 300 05	7331002905110	KIMA WFM 120	500	17,0	975	8,5	52 - 60
107 300 06	7331002905127	KIMA WFM 120	500	21,0	1300	10,5	39 - 45
E 89 878 64	7331002905134	KIMA WFM 120	500	26,0	1550	13,0	32 - 38

