

Kima Warm Floor Mat 75

Aplicatii:


Incalzire electrica in pardoseala in podelele subtiri, -
in partea de sus a unei pardoseli de beton existente,
in zonele umede si uscate.

Incalzire in pardoseala sub pardoselile din lemn.

Important! Cablul incalzitor nu poate fi taiat.

Specificatii tehnice:

- Ignifug, conductor bifilar fara camp magnetic
- Izolatie clasa - I
- IP67
- Temperatura de operare max +90°C
- Tensiune de alimentare 230 Volt
- Putere 75 W/m².
- Latime 500 mm.
- Cablu de alimentare - 3 m cu ecranaj metalic.
- Fabricat in conformitate cu EN60335-1, EN60335-2-96.
- Respecta directiva RoHS 2002/95/EC

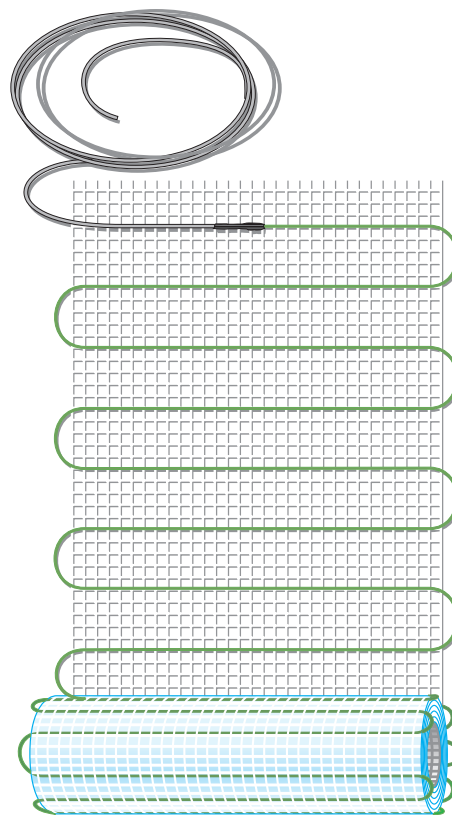

Nr. Art.	Cod produs	Tip produs	Latime (mm)	Lungime (m)	Putere (W)	Suprafata (m ²)	Rezistenta (Ohm)
10730201	7331002910015	KIMA WFM 75	500	2,0	75	1,0	670 - 776
10730202	7331002910022	KIMA WFM 75	500	3,0	115	1,5	437 - 506
10730203	7331002910039	KIMA WFM 75	500	4,0	150	2,0	335 - 388
10730204	7331002910046	KIMA WFM 75	500	5,0	190	2,5	265 - 306
10730205	7331002910053	KIMA WFM 75	500	6,0	225	3,0	223 - 259
10730206	7331002910060	KIMA WFM 75	500	7,0	265	3,5	190 - 220
10730207	7331002910077	KIMA WFM 75	500	8,0	300	4,0	168 - 194
10730208	7331002910084	KIMA WFM 75	500	10,0	375	5,0	134 - 155
10730209	7331002910091	KIMA WFM 75	500	12,0	450	6,0	112 - 129
10730210	7331002910107	KIMA WFM 75	500	14,5	550	7,2	91 - 106
10730211	7331002910114	KIMA WFM 75	500	16,0	600	8,0	84 - 97
10730212	7331002910121	KIMA WFM 75	500	21,0	790	10,5	64 - 74

